



Button Attacher Machine With Bar Tack Attachment

Bobjet-1903A

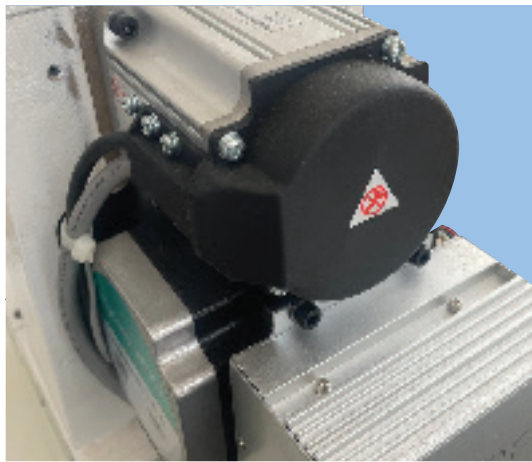

Excellent Responsiveness with AC Servo Motor

The direct-drive system that directly connects the compact AC servomotor. This system enables quick startup improved responsiveness.



Auto-lifter mechanism

The machine is provided as standard with auto-lifter that uses a stepping-motor system. The work clamp foot lift can be set to a maximum of 13mm.




Including Bar Tack Attachment

Electronic bar tacking machine for light and medium materials. For the use for bar tack conversion and button attachment 2 in 1 option


Specifications

Model name	Bobjet-1903A
Application	Standard
Max. Sewing speed	2,700sti/min*
Button size	Type : Round-shaped, flat button (2-holed, 4-holed) Size : φ8~φ32mm
Lubrication	Semi-dry head (Hook: minute-quantity lubrication)
Stitch length	0.1~10mm (0.1mm step)
Needle bar stroke	45.7mm
Lift of the work clamp foot	Max.13mm
Auto-lifter	Provided as standard (stepping motor type)
Needle thread tension	Spring type dial thread tension controller
Needle (at the time of delivery)	DP×17 (#14)
Hook	Standard shuttle hook
Number of stitches that can be stored in memory	Max. 20,000 Stitches
Number of standard patterns	50 Patterns
Number of data that can be input	200 Patterns
Memory medium	Internal-organs memory
Bobbin thread counter	Provided as standard (up/down method)
Sewing machine motor	Compact AC servomotor (direct-drive system)
Power supply/Power consumption	Single-phase 200~240V/350VA
Weight	Machine head (include Control Box) 45kg



Different Sewing Patterns

The machine is provided as standard with 50 different sewing patterns.

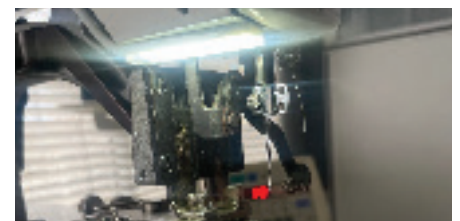

In Built LED light

The LED light that illuminates the needle entry area is provided as standard. The LED light is provided with the six-step changeover switch to control its brightness and light-out.